




Mapecem

Special fast setting and drying (24 hours) hydraulic binder for shrinkage-compensated screeds

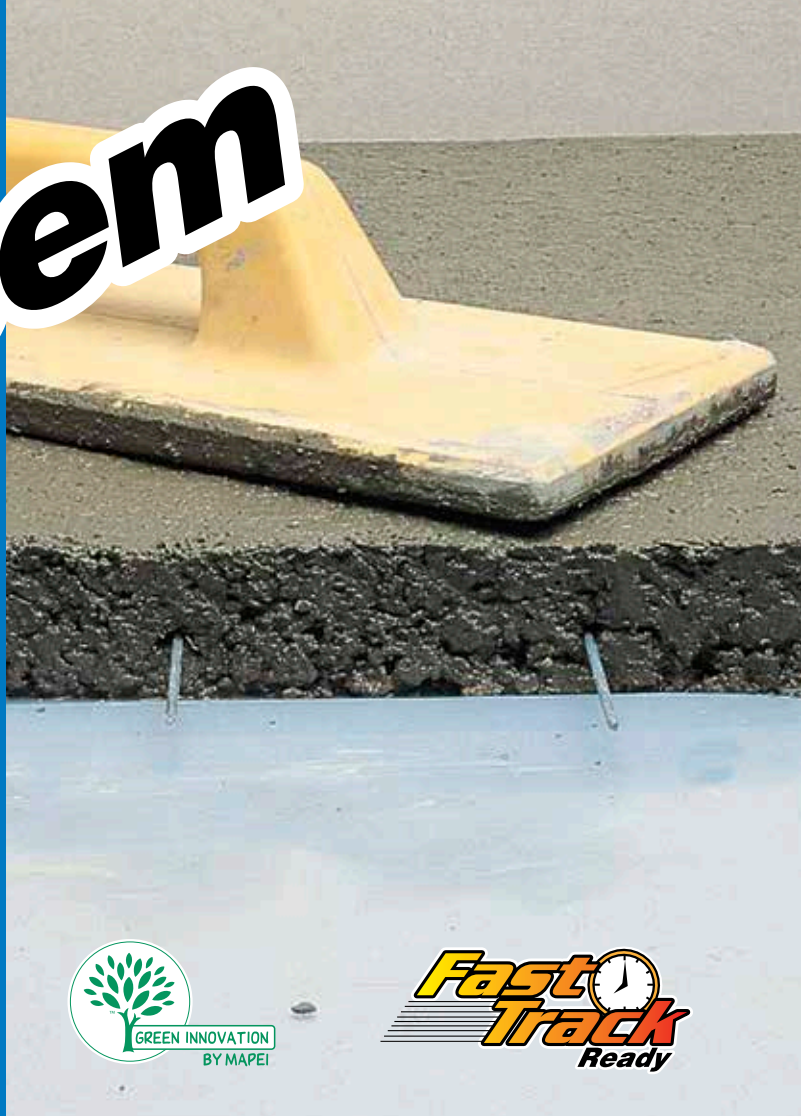

WHERE TO USE

Preparation of both floating and bonded screeds on existing and new slabs for the installation of timber flooring, PVC, linoleum, ceramic tiles, carpet or any other flooring where fast-drying is required for minimum downtime.

Some application examples

- Preparation of screeds set to light foot traffic after 2-3 hours and perfectly dry after 24 hours, for the installation of timber and resilient flooring.
- Preparation of screeds ready to receive ceramic tiles and natural stone after only 3-4 hours.
- Patching and repairing screeds in areas subject to continuous traffic (supermarkets, hospital, airports, etc.).
- Preparation of screeds incorporating underfloor heating systems.

TECHNICAL CHARACTERISTICS

Mapecem is a special hydraulic binder, which, when mixed with dry, clean graded aggregates and water, has the extraordinary capacity to harden in just a few hours and to dry perfectly regardless of thickness within 24 hours (residual moisture less than 2% by weight).

Because of these characteristics and the very high mechanical strength, **Mapecem** is the ideal binder for screeds onto which resilient, textile, timber, ceramic or stone floorings must be installed within 24 hours only.

RECOMMENDATIONS

- Do not use **Mapecem** on substrates subject to rising damp (lay a waterproofing membrane first).
- Do not use **Mapecem** mixed with other cements, lime, gypsum, etc.
- Do not leave **Mapecem** dry-mixed with aggregates (quickly add the right quantity of water and use immediately).
- Do not mix **Mapecem** only with fine sand (use aggregates graded from 0 to 8 mm or **Gravel 0-8** for thicknesses of max 8-9 cm).
- Do not mix **Mapecem** with an insufficient quantity of water (this will cause partial hydration and compromise its mechanical strength).
- Do not leave **Mapecem** mix in the mixer for more than 3-4 minutes.
- Do not mix **Mapecem** with an excessive quantity of water (drying time will be lengthened).
- Since **Mapecem** screeds are very compact, absorption of the water contained in water dispersion adhesives is slow: it is therefore recommended to use **Ultrabond P990 1K** polyurethane adhesive for installing timber floors that are particularly sensitive to moisture.
- Do not add water to a prepared mix and do not remix **Mapecem** after it has started to set.

Mapecem



Aggregates for Mapecem: gravel from 4 to 8 mm and sand from 0 to 4 mm



The correct consistency of Mapecem



Mixing Mapecem with an automatic pumping unit



Covering pipes with Mapecem and reinforcement netting

- Do not wet the surface of a screed laid with **Mapecem**.
- Do not mix in batching plants and do not transport the mixture by cement mixer truck: the setting time of **Mapecem** is too short!

APPLICATION PROCEDURE

Preparing the substrate

All substrates are suitable for receiving a **Mapecem** screed as long as they are not subject to rising damp, in which case install a suitable vapour barrier.

For non floating screeds (from 10 to 35 mm), which have therefore to be anchored, the substrate must be dry, free from cracks, resistant to compressive and tensile strength, free from dust, loose materials, paints, wax, oil, traces of gypsum.

Floating screeds from 35 to 60 mm

Preparing the mix

Mapecem must be mixed carefully and quickly, with water and graded aggregates 0-8 mm in diameter or with **Gravel 0-8**, for a maximum of 3-4 minutes, in a mixer or batcher.

The mix must be spread and levelled in the shortest time possible and not more than 30 minutes after mixing.

Special care must be taken with the quantity of water that must be enough to form a cohesive mass so that tamping gives a flat surface without a cement film.

Mapecem aggregates and water can be mixed:

- in a drum mixer;
- in an ordinary concrete mixer;
- in a screw mixer;
- manually, with a shovel.

The **Mapecem** mix can be placed using an automatic pressure pump.

In any case it is absolutely necessary to strictly follow the instructions regarding the dosage and mixing time.

Spreading the mix

The **Mapecem** mix is placed onto a substrate like any ordinary concrete. A polyethylene sheet must be laid (even over a bituminous membrane or other existing waterproofing substrate) in order to create an easily flowing layer between the **Mapecem** screed and the already existing substrate and at the same time to prevent any rising damp.

If the **Mapecem** screed is crossed by pipes, it is

necessary to lay a light metal mesh (a hexagonal mesh, for instance) over the screed as a reinforcement and ensure a minimum thickness of 2.5 cm.

Mapecem screeds are prepared using the same methods as those for ordinary cement screeds: preparing levelling strips, spreading the mix and accurately compacting it and then tamping to obtain a better surface finish.

Around the perimeter of the area and around the columns etc., it is recommended to insert a 1 cm thick anti-fracture material (such as felt board, cork, polystyrene, etc.).


If work is interrupted for more than 1 hour, it is necessary to cut the screed perpendicularly and insert pieces of rod (20-30 cm long and 3-6 mm in diameter) into the edge of the screed. They should be inserted 20-30 cm apart to guarantee perfect bonding and to avoid cracks and differing levels and prepare a suitable bonding slurry.

Recommended proportions

Mapecem:	350-450 kg
Graded aggregates from 0 to 8 mm	
Gravel 0-8:	1 m ³
Water:	from 80 to 160 kg depending on the moisture in the aggregates

equal to:

Mapecem:	one 20 kg bag
Graded aggregates from 0 to 8 mm	80-100 kg or
Gravel 0-8:	13-15 shovelfuls
Water:	from 4 to 8 kg depending on the moisture in the aggregates

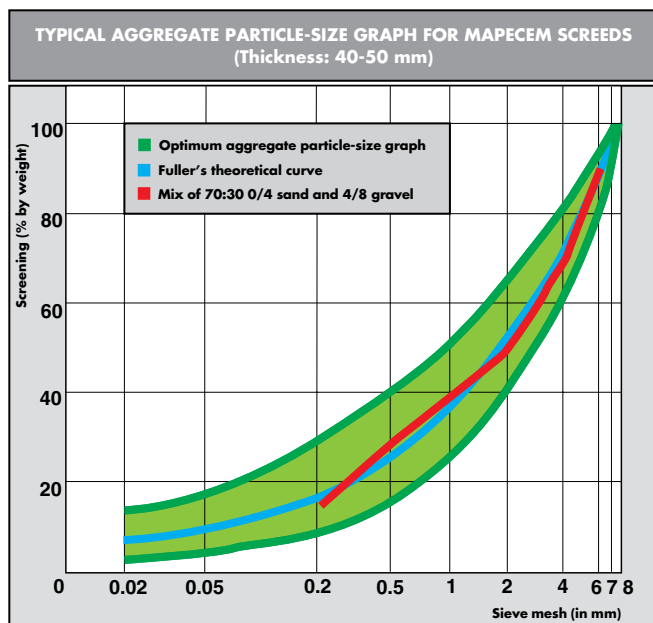

TECHNICAL DATA (typical values)

PRODUCT IDENTITY

Consistency:	powder
Colour:	grey
Bulk density (kg/m ³):	1,300
Dry solids content (%):	100
Green Star™	contributes valuable points towards Green Star™ credits - very low VOC content g/l

APPLICATION DATA (at +23°C – 50% R.H.)

Recommended mixing ratio:	350-450 kg of Mapecem with 1 m ³ aggregates (from 0 to 8 mm diameter) and 80-160 kg of water, depending on the moisture in the aggregates.
Density of the mix (kg/m ³):	2,200-2,250
Duration of mixing:	3-4 minutes
Open time of mix:	20-30 minutes
Application temperature range:	from +5°C to +35°C
Set to light foot traffic:	2-3 hours
Ready for use:	24 hours
Ready for levelling:	after 4 hours
Waiting time before installation:	3 hours for ceramic tiles and stone material 24 hours for resilient coverings and wood
Residual moisture after 24 hours (%):	< 2

FINAL PERFORMANCES

Resistance to acids:	fair
Resistance to alkali:	excellent
Resistance to oils:	excellent
Resistance to solvents:	excellent
Temperature when in use:	from -30°C to +90°C
Mechanical strength:	see tables and graphs

Mechanical strength of Mapecem with 0-8 mm sand

Proportion of Mapecem	Flexural strength (N/mm ²)			Compressive strength (N/mm ²)			Residual moisture (%)		
	24 h	3 gg	28 gg	24 h	3 gg	28 gg	24 h	3 gg	28 gg
350 kg/(m ³ sand)	5.4	6.7	7.0	33.0	42	47	2	1.6	1.5
400 kg/(m ³ sand)	5.6	7.0	7.5	40.5	47	53	1.8	1.3	1.2
450 kg/(m ³ sand)	6.6	7.5	8.0	47.0	51	57	1.6	1.2	1.1



Mixing Mapecem in a mini-batcher



Spreading the anchoring slurry for bonded Mapecem screeds



Finishing a Mapecem screed with Ultraplan self-levelling compound

Bonded screeds from 10 to 35 mm thick

Preparing the mix, proportions and spreading the mix are exactly the same as for floating screeds, but first it is necessary to apply a **Planicrete** anchoring slurry onto the perfectly clean substrate.

Dosage of the anchoring slurry

Planicrete: 1 part by weight

Water: 1 part by weight

Mapecem: 2 parts by weight

OR

Planicrete SP: 1 part by weight

Mapecem: 1 part by weight

In order to ensure bonding, the slurry must be applied onto the surface that needs to be covered just before the **Mapecem** screed is installed (fresh on fresh).

MEASURING THE MOISTURE

Electronic hygrometers supply only indicative values for measuring moisture. The residual moisture level of **Mapecem** screeds must absolutely be measured with a carbide hygrometer, which provides absolute values of moisture by weight.

Cleaning

Tools are cleaned with plenty of water.

CONSUMPTION

Consumption varies depending on the thickness of the screed and the amount of **Mapecem**.

For 350-450 kg of **Mapecem** per m³ of aggregates, consumption is 3.5-4.5 kg/m² per cm of thickness.

PACKAGING

20 kg paper bags.

STORAGE

12 months in a dry place in the original packing. However, in time, setting time

could be slower without altering the final performances.

SAFETY INSTRUCTIONS FOR PREPARATION AND APPLICATION

Mapecem contains cement that when in contact with sweat or other body fluids causes irritant alkaline reactions and allergic reactions to those predisposed. It can cause damage to eyes.

During use wear protective gloves and goggles and take the usual precautions for handling chemicals. If the product comes in contact with the eyes or skin, wash immediately with plenty of water and seek medical attention.

For further and complete information about the safe use of our product please refer to the latest version of our Safety Data Sheet.

PRODUCT FOR PROFESSIONAL USE.

WARNING

Although the technical details and recommendations contained in this product data sheet correspond to the best of our knowledge and experience, all the above information must, in every case, be taken as merely indicative and subject to confirmation after long-term practical application: for this reason, anyone who intends to use the product must ensure beforehand that it is suitable for the envisaged application: in every case, the user alone is fully responsible for any consequences deriving from the use of the product.

Please refer to the current version of the **Technical Data Sheet**, available from our web site www.mapei.com.au



Batching a Mapecem mix



Preparing a levelling strip



Using the straight-edge




Tamping the Mapecem screed




Fast repair of a screed in a supermarket

MAPECEM: TECHNICAL DATA


COMPRESSIVE STRENGTH OF MAPECEM WITH DIFFERENT MIXES

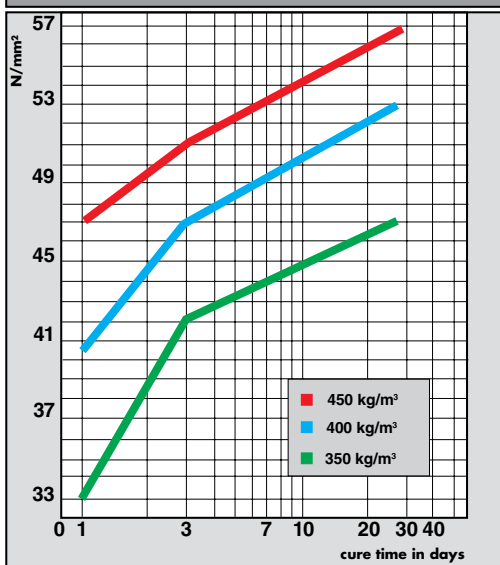


FLEXURAL STRENGTH OF MAPECEM WITH DIFFERENT MIXES

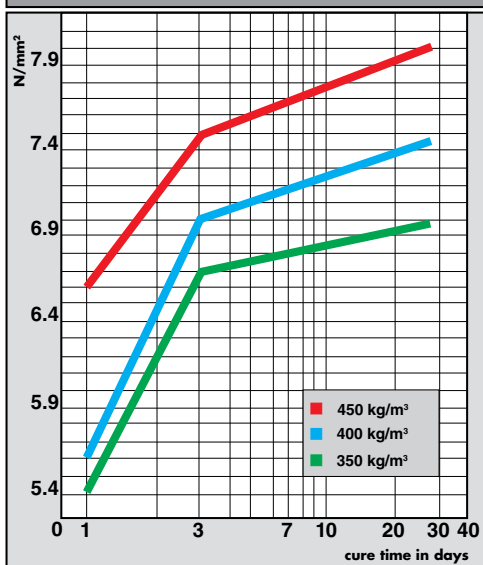

MAPECEM SCREED SHRINKAGE (450 kg/m³ of aggregates)

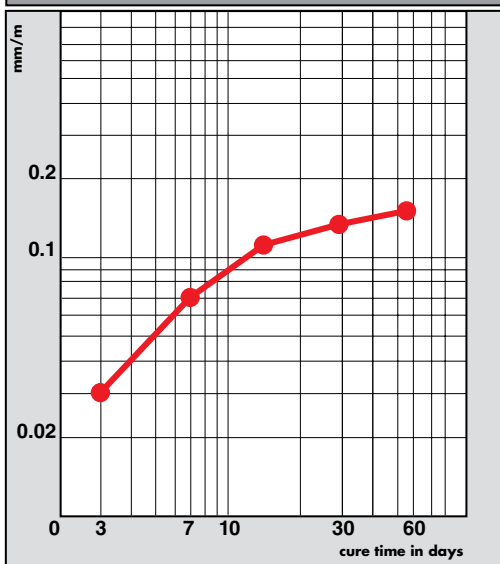

RESIDUAL MOISTURE IN MAPECEM SCREED

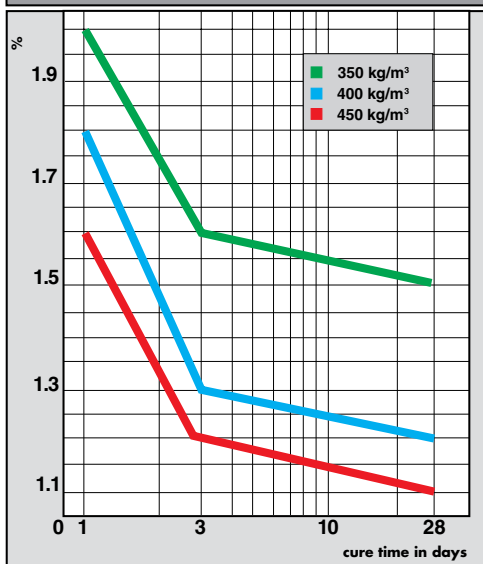

Laying and smoothing of the Mapecem screed - Sistine Halls - Vatican City

Mapecem



Mapecem: the ideal screed for all types of flooring



Mixing Mapecem with Planicrete SP to make an anchoring slurry

LEGAL NOTICE

The contents of this Technical Data Sheet ("TDS") may be copied into another project-related document, but the resulting document shall not supplement or replace requirements per the TDS in force at the time of the MAPEI product installation.

The most up-to-date TDS can be downloaded from our website www.mapei.com.

ANY ALTERATION TO THE WORDING OR REQUIREMENTS CONTAINED OR DERIVED FROM THIS TDS EXCLUDES THE RESPONSIBILITY OF MAPEI.

All relevant references for the product are available upon request and from www.mapei.com.au



Our Commitment To The Environment

MAPEI products contribute valuable points towards Green Star™ certified projects, in compliance with the Green Building Council of Australia.



Carbide hygrometer for measuring the moisture level of a Mapecem screed



Electronic hygrometer for measuring the moisture level of a Mapecem screed

Mapei Australia Pty. Ltd
 180 Viking Drive Wacol Qld 4076
 Tel. +61-7-3276 5000 - Fax. +61-7-3276 5076
 Website: www.mapei.com.au - Email: sales@mapei.com.au
Manufactured in Brisbane - Australia



BUILDING THE FUTURE

Any reproduction of texts, photos and illustrations published here is prohibited and subject to prosecution

201-02-2017 (AUS)